

GHV hydrovar X

THE ULTIMATE INTEGRATED MOTOR & DRIVE SOLUTION IN PERFORMANCE, ENERGY EFFICIENCY, CONNECTIVITY AND SIMPLICITY



The Lowara GHV series booster sets are fully automatic booster sets for water supply, water pressure increase and water transfer in apartment blocks, office buildings, hotels, public buildings, industries and other applications.

The GHV series is equipped with 1 to 8 vertical multistage e-SV pumps, each fitted with a Hydrovar variable frequency drive independently controlled for the maximum reliability. Thanks to its unique compact design version, the GHV series makes installation possible even in tight spaces. The GHV series is easy to program, designed for maximum energy efficiency and can communicate with a BMS system via Modbus or BACnet.

Specifications

Flow rate: up to 1280 m³/h

Head: up to 160 m

Temp of pumped liquid: up to +65°C

WRAS Approved


The hydraulic performances meet the tolerances specified in ISO 2012





Scan QR code to open GHV Hydrovar X Product page















All models shown below are stocked in the UK

| Model Ref | | Part Number | Number of | Motor Size | Dimensions (mm) | | | | | | Т |
|-----------|-----------------------|--------------------|----------------|----------------------|-----------------|-----|-----|-----|-----|------|-----|
| | | | Pumps | (kW) | Α | В | С | H | H1 | L | |
| | GHV20/10SVX06R030/4 | 1008030506 | 2 | 3 | 356 | N/A | 612 | 190 | 401 | 1050 | |
| | GHV30/10SVX06R030/4 | 1008031724 | | | 363 | | 629 | 190 | 401 | 1420 | |
| | GHV20/10SVX06F030/4 | 1008030504 | 2 | 3 | 294 | 356 | 757 | 190 | N/A | 1050 | |
| | GHV30/10SVX06F030/4 | 1008031722 | 3 | 3 | 301 | 363 | 789 | 190 | N/A | 1420 | |
| 1 | GHV20/15SVX03Z2R040/4 | 1008900201 | 2 | 4 | 418 | N/A | 621 | 200 | 459 | 1050 | |
| | GHV20/15SVX05R055/4 | 1008030551 | 2 | 5.5 | 418 | N/A | 621 | 200 | 459 | 1050 | |
| | GHV30/15SVX03Z2R040/4 | 1008900204 | 3 | 4 | 430 | N/A | 743 | 200 | 459 | 1420 | |
| | GHV30/15SVX05R055/4 | 1008031769 | 2 | 5.5 | 430 | N/A | 743 | 200 | 459 | 1420 | |
| | 111 NSVO. 1 A 100 | | \$ 100 100 100 | 25-84 (1-5-64). 1-77 | 200 | | 17 | | / | _ | 1.7 |

Performance Curve Single pump curve shown only

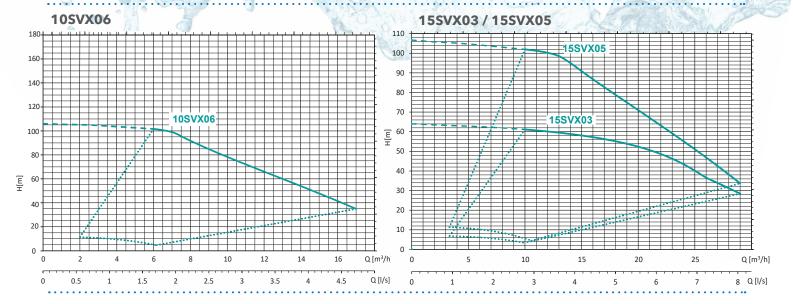



Xylem Water Solutions UK Ltd.

Millwey Rise Industrial Estate Axminster, Devon EX13 5HU Tel 01297 630 230 Email lowaraukenquiries@xylem.com

Xylem Water Solutions Ireland Ltd.

50 Broomhill Close, Airton Road, Tallaght, Dublin 24 D24 APP8 Tel (+353) 01 4524 444 Email flygtIRL@xylem.com



Scan QR code to open GHV Hydrovar X Tech Cat