


22SV SERIES


DIMENSIONS AND WEIGHTS AT 50 Hz, 2 POLES

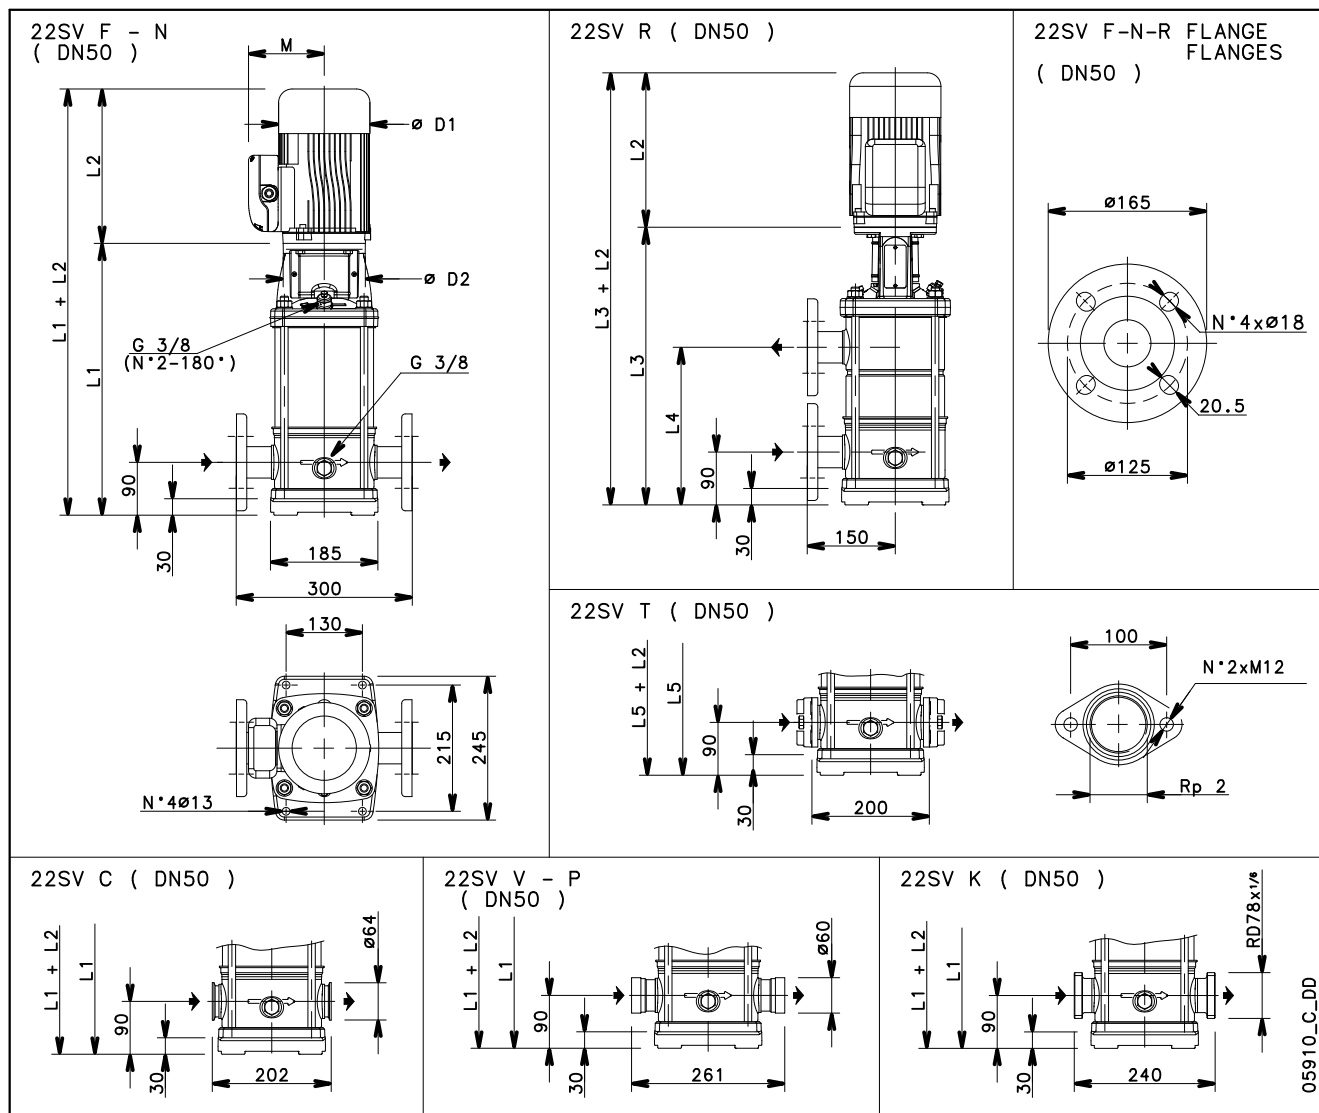

PUMP TYPE	MOTOR		DIMENSIONS (mm)											WEIGHT kg		
	kW	SIZE	L1	L2		L3	L4	L5	M		D1		D2	PUMP	ELECTRIC PUMP	
				1 ~	3 ~				1 ~	3 ~	1 ~	3 ~			1 ~	3 ~
22SV01../D	1,1	80	399	263	263	-	-	399	137	129	129	155	120	15,5	27,0	26,9
22SV02../D	2,2	90	409	-	298	-	-	409	-	134	-	174	140	17,2	-	35,4
22SV03../D	3	100	467	-	298	-	-	467	-	134	-	174	160	19,4	-	40,4
22SV04../D	4	112	515	-	319	515	301	515	-	154	-	197	160	20,7	-	47,1
22SV05../D	5,5	132	630	-	375	630	349	630	-	168	-	214	300	26,7	-	65,0
22SV06../E	7,5	132	678	-	345	678	397	678	-	186	-	264	300	28,0	-	79,7
22SV07../E	7,5	132	726	-	345	726	445	726	-	186	-	264	300	29,3	-	81,0
22SV08../D	11	160	804	-	428	804	493	804	-	191	-	256	350	33,1	-	104
22SV09../D	11	160	852	-	428	852	541	852	-	191	-	256	350	34,4	-	105
22SV10../D	11	160	900	-	428	900	589	900	-	191	-	256	350	35,8	-	107
22SV12../E	15	160	996	-	500	996	685	-	-	240	-	321	350	38,4	-	141
22SV14../E	15	160	1092	-	500	1092	781	-	-	240	-	321	350	41,1	-	144
22SV17../E	18,5	160	1236	-	545	1236	925	-	-	240	-	322	350	45,1	-	163

22sv-2p50-en_f_td

22SV SERIES
OPERATING CHARACTERISTICS AT 50 Hz, 2 POLES

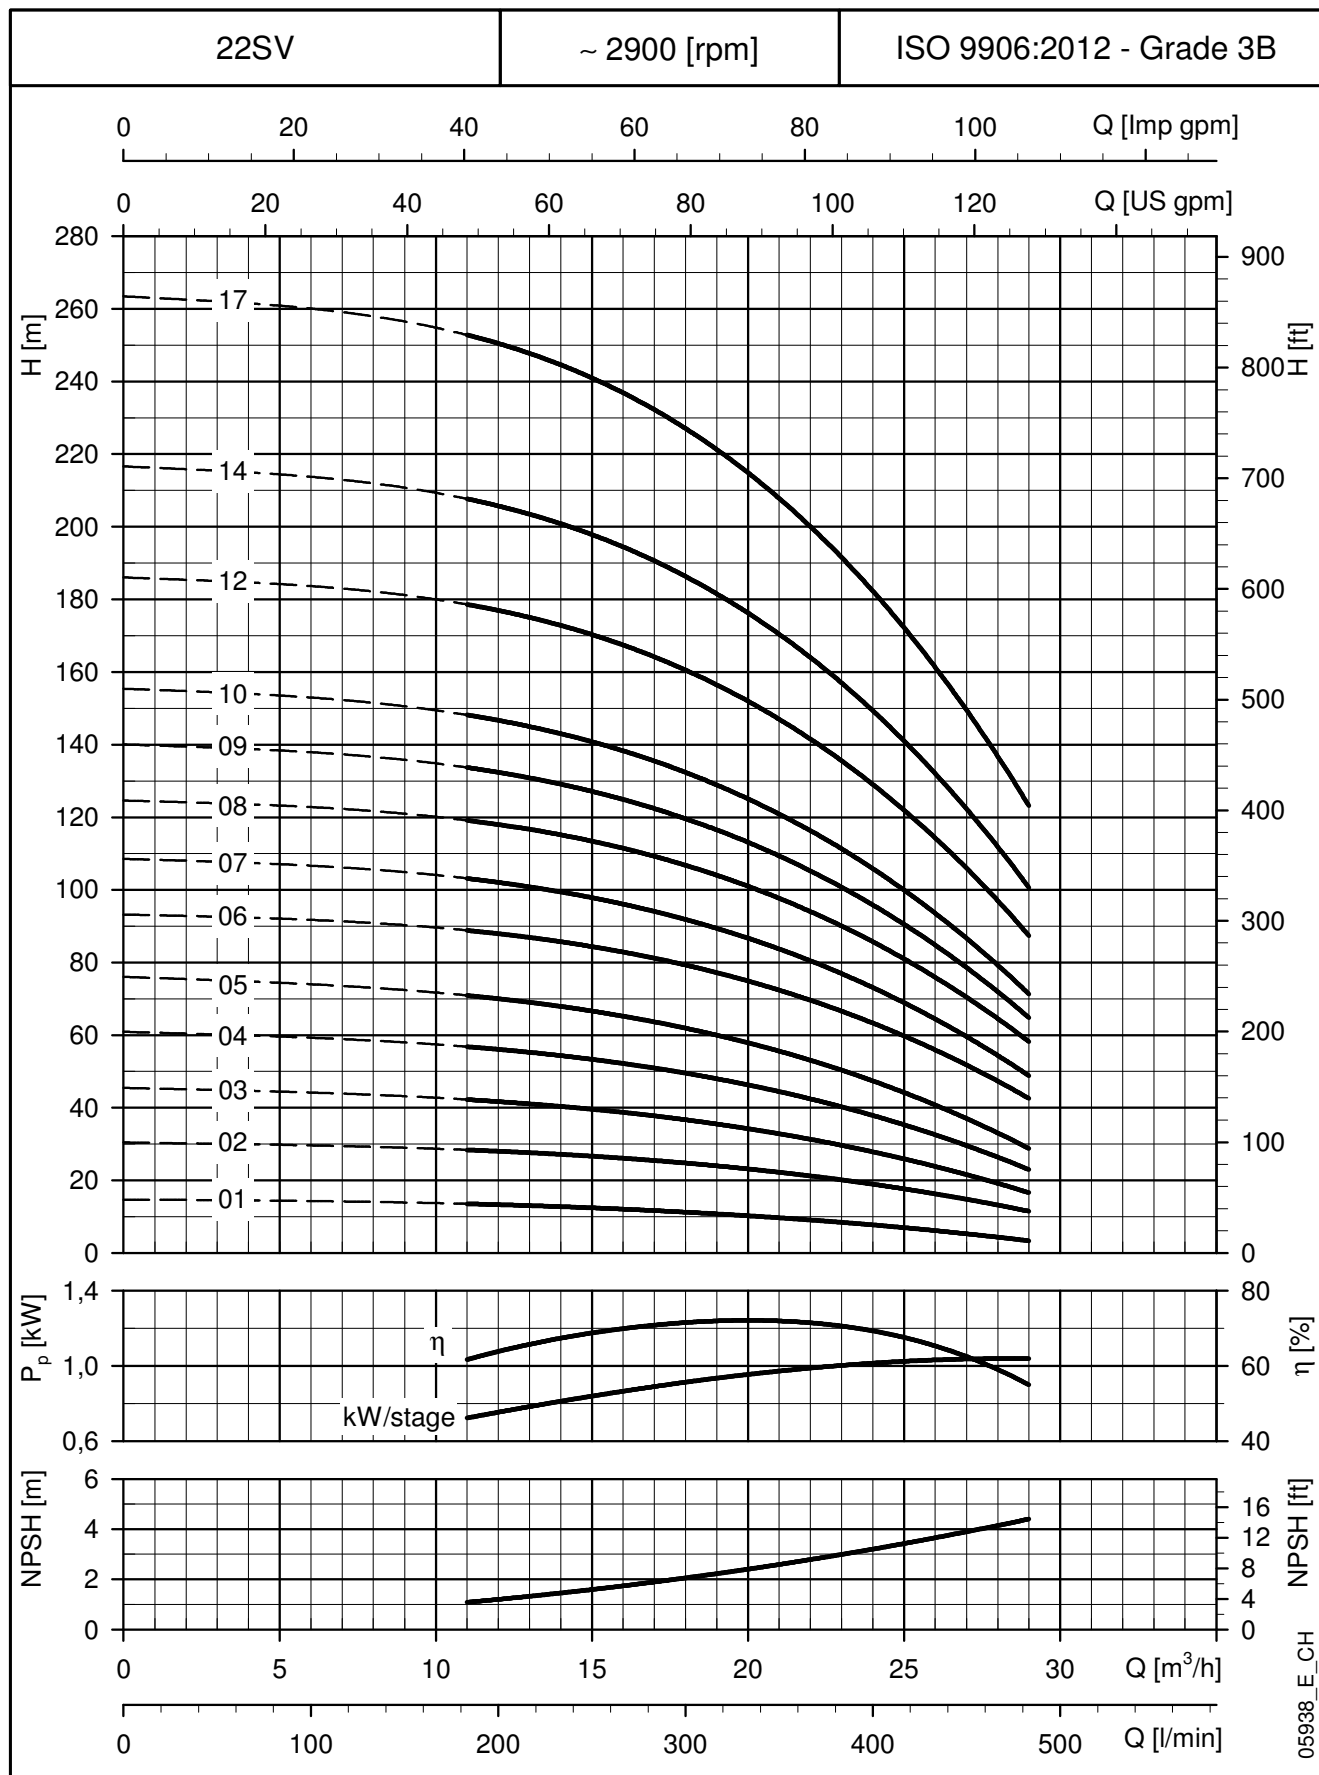

These performances are valid for liquids with density $\rho = 1.0 \text{ kg/dm}^3$ and kinematic viscosity $\nu = 1 \text{ mm}^2/\text{sec}$.