

SB, SBA

Installation and operating instructions



SB, SBA

English (GB)	
Installation and operating instructions	5
Български (BG)	
Упътване за монтаж и експлоатация	19
Čeština (CZ)	
Montážní a provozní návod	35
Deutsch (DE)	
Montage- und Betriebsanleitung	49
Dansk (DK)	
Monterings- og driftsinstruktion	65
Eesti (EE)	
Paigaldus- ja kasutusjuhend	79
Español (ES)	
Instrucciones de instalación y funcionamiento	93
Suomi (FI)	
Asennus- ja käyttöohjeet	108
Français (FR)	
Notice d'installation et de fonctionnement	122
Ελληνικά (GR)	
Οδηγίες εγκατάστασης και λειτουργίας	137
Hrvatski (HR)	
Montažne i pogonske upute	153
Magyar (HU)	
Telepítési és üzemeltetési utasítás	167
Italiano (IT)	
Istruzioni di installazione e funzionamento	182
Lietuviškai (LT)	
Įrengimo ir naudojimo instrukcija	197
Latviešu (LV)	
Uzstādīšanas un ekspluatācijas instrukcija	211
Nederlands (NL)	
Installatie- en bedieningsinstructies	227
Polski (PL)	
Instrukcja montażu i eksploatacji	243

Português (PT)	
Instruções de instalação e funcionamento	258
Română (RO)	
Instrucțiuni de instalare și utilizare	273
Srpski (RS)	
Uputstvo za instalaciju i rad	288
Русский (RU)	
Паспорт, Руководство по монтажу и эксплуатации	303
Svenska (SE)	
Monterings- och driftsinstruktion	318
Slovensko (SI)	
Navodila za montažo in obratovanje	332
Slovenčina (SK)	
Návod na montáž a prevádzku	347
Türkçe (TR)	
Montaj ve kullanım kılavuzu	361
Українська (UA)	
Інструкції з монтажу та експлуатації	375
Bosanski (BS)	
Montažne i pogonske upute	390
Macedonian (MK)	
Упатства за монтирање и ракување	405
(AR) العربية	
تعليمات التركيب و التشغيل	420

English (GB) Installation and operating instructions

Original installation and operating instructions

Table of contents

1.	General Information	5
1.1	Hazard statements	5
1.2	Notes	6
2.	Receiving the product.	6
2.1	Inspecting the packaging	6
2.2	Scope of delivery	6
3.	Installing the product	6
3.1	Location	6
3.2	Mechanical installation	8
3.3	Pump position	8
3.4	Connecting the outlet hose or pipe	9
3.5	Non-return valve for SB pumps.	9
3.6	Electrical connection	9
4.	Starting up the product	10
4.1	SBA starting and stopping conditions	10
5.	Handling and storing the product	11
5.1	Handling the product	11
5.2	Storing the product	11
5.3	Frost protection	11
6.	Product introduction	11
6.1	Product description	11
6.2	SB pumps	11
6.3	SBA pumps	11
6.4	SBA dry-running protection	11
6.5	Intended use	12
6.6	Pumped liquids	12
6.7	Identification.	12
7.	Maintaining the product.	13
8.	Fault finding the product	14
8.1	The pump does not run.	14
8.2	The pump runs but gives no water.	15
8.3	The pump runs at reduced performance.	15
8.4	Frequent starts and stops.	16
8.5	Leaking water from the drain holes.	16
9.	Technical data	17
9.1	Operating conditions	17
9.2	Mechanical data.	17
9.3	Electrical data	18
10.	Further product information	18
11.	Disposing of the product	18

1. General Information



Read this document before you install the product. Installation and operation must comply with local regulations and accepted codes of good practice.



This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved.

Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

1.1 Hazard statements

The symbols and hazard statements below may appear in Grundfos installation and operating instructions, safety instructions and service instructions.



DANGER

Indicates a hazardous situation which, if not avoided, will result in death or serious personal injury.



WARNING

Indicates a hazardous situation which, if not avoided, could result in death or serious personal injury.



CAUTION

Indicates a hazardous situation which, if not avoided, could result in minor or moderate personal injury.

The hazard statements are structured in the following way:



SIGNAL WORD

Description of the hazard

Consequence of ignoring the warning

- Action to avoid the hazard.

1.2 Notes

The symbols and notes below may appear in Grundfos installation and operating instructions, safety instructions and service instructions.



Observe these instructions for explosion-proof products.



A blue or grey circle with a white graphical symbol indicates that an action must be taken.



A red or grey circle with a diagonal bar, possibly with a black graphical symbol, indicates that an action must not be taken or must be stopped.



If these instructions are not observed, it may result in malfunction or damage to the equipment.



Tips and advice that make the work easier.

3. Installing the product



Make sure that the system in which the pump is incorporated is designed for the maximum pump pressure.



This pump has been evaluated for use with water only.



Observe local regulations concerning limits for manual lifting or handling.

CAUTION

Crushing of feet

Minor or moderate personal injury

- Use safety shoes when handling the pump.



DANGER

Electric shock

Death or serious personal injury

- Switch off the power supply before you start any work on the product. Make sure that the power supply cannot be accidentally switched on.



2. Receiving the product

2.1 Inspecting the packaging

On receipt of the product, do the following:

1. Check that the product is as ordered. If the product is not as ordered, contact the supplier.
2. Check that no visible parts have been damaged. If any visible parts have been damaged, contact the transport company.

2.2 Scope of delivery

The box contains the following items:

- 1 pump
- 1 adapter
- 1 installation and operating instructions
- 1 quick guide
- 1 floating inlet strainer, for side inlet variant only
- 1 non-return valve, for SB only.

3.1 Location

Install the pump in a frost-free location.

Before the pump is submerged in the well or tank, make sure that the well or tank does not contain sand or solid sediment.

Install the pipe so that the pump is not exposed to mechanical stress.

3.1.1 Maximum installation depth

Read the label on the product.

Product	Maximum installation depth
	[m]
SB	10
SBA	10

3.1.2 Highest tapping point for SBA pumps


Install SBA pumps so that the height between the pump and the highest tapping point does not exceed these values:

SBA 3-35: 13 m.

SBA 3-45: 20 m.

SBA 3-35

SBA 3-45

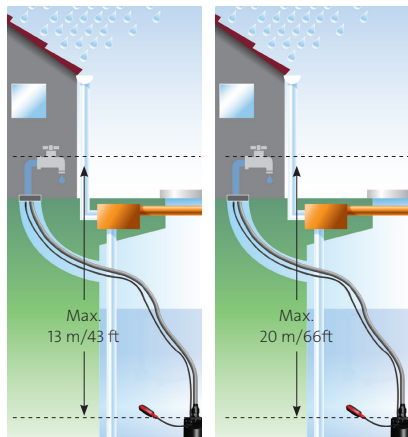

TM067648

Highest tapping point for SBA

Related information

[8.4 Frequent starts and stops.](#)

3.1.3 Minimum space


Pumps installed with a float switch require a free space between the float switch and the wall to ensure free movability.

Pumps with side inlet require a free space between the floating inlet strainer and the wall.

If you install the pump in a well or tank, the minimum free space must be as shown in the figure below.

Pumps installed without a float switch require a space that corresponds to the physical dimensions of the pump.

SB and SBA pump with a float switch and side inlet

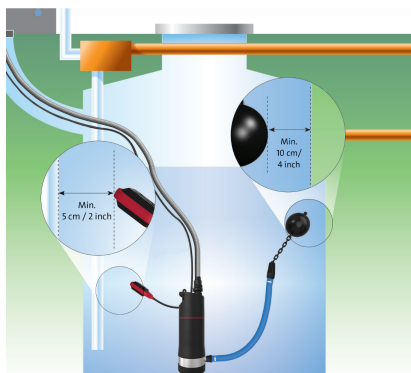

TM082302

Minimum space for SB and SBA pump in a well or tank

3.1.4 Adjustment of the float switch


To make sure that the float switch can start and stop the pump, adjust the start and stop level by changing the free cable length between the float switch and the lifting handle.

A reduced free cable length results in more starts and stops and a small difference in level. The minimum free cable length is 10-18 cm. See fig. [Minimum free cable length for float switch](#).

- An increased free cable length results in fewer starts and stops and a large difference in level.

Make sure that the float switch can move freely.

Make sure that the stop level does not fall below the pump inlet strainer.

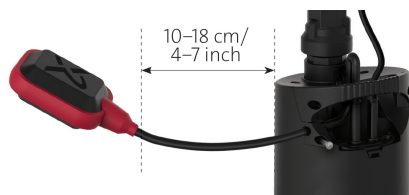

TM082305

Minimum free cable length for float switch

3.2 Mechanical installation

3.2.1 Lifting the product

Lift the pump by the lifting handle. Never lift the pump by the power cable. Tie a rope to the lifting handle or lifting eye instead.



Do not lift the product by the power cable. Lift the product by means of a rope.



TM071402

Lifting the pump


Related information

[3.3.1 Pump position of SB and SBA](#)

3.3 Pump position

3.3.1 Pump position of SB and SBA

Use the pump in the vertical position as shown in fig. [Position of SB, SBA pumps](#).



TM082310

Position of SB, SBA pumps


Related information

[3.2.1 Lifting the product](#)

3.4 Connecting the outlet hose or pipe

Product	External pipe thread [inch]
SB	G 3/4" or 1"
SBA	G 3/4" or 1"

The outlet hose or pipe can be connected to the pump outlet port by means of an adapter. You can also connect a pipe directly to the pump outlet. SB and SBA pumps include an adapter. Cut off the adapter so that it matches the outlet port diameter.

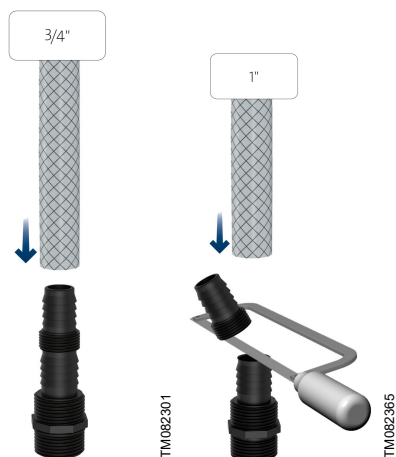

3.5 Non-return valve for SB pumps

Connect the non-return valve to the SB pump outlet. The non-return valve has G 1" threads for connection to the adapter or the pipe.



Non-return valve

3.6 Electrical connection

DANGER

Electric shock

Death or serious personal injury



- Switch off the power supply before you start any work on the product. Make sure that the power supply cannot be accidentally switched on.
- The pump must be earthed.

DANGER

Electric shock

Death or serious personal injury



- The protective earth of the socket outlet must be connected to the protective earth of the pump. The plug must therefore have the same PE connection system as that of the socket outlet. If not, use a suitable adapter.



We recommend that you fit the permanent installation with a residual-current circuit breaker, RCCB, with a tripping current less than 30 mA.

DANGER

Electric shock

Death or serious personal injury



- If the pump is used for cleaning or other maintenance of swimming pools, garden ponds or similar places, make sure that the pump is supplied through a residual-current circuit breaker, RCCB, with a tripping current of 30 mA.

DANGER

Electric shock

Death or serious personal injury



- Connect pumps that are delivered without cable and/or plugs to an external main switch with a minimum contact gap of 3 mm in all poles.



Make sure that there is at least 3 m free cable above the liquid level.

Check that the supply voltage and frequency correspond to the values stated on the pump nameplate.

The electrical connection must be carried out by an authorised electrician in accordance with local regulations.

3.6.1 Thermal protection

The pump has a built-in thermal switch and requires no additional motor protection. If the pump is running without water, or if it is otherwise overloaded, the built-in thermal switch will cut out. When the motor has cooled to normal temperature, it will restart automatically.

3.6.2 Connecting to external controller

SB

SB pumps must be connected to an external controller. We recommend a Grundfos Pressure Manager: net.grundfos.com/qr/i/97506325

SBA

SBA pumps have an integrated control unit.

Related information

[6.2 SB pumps](#)

[6.3 SBA pumps](#)

3.6.3 Power supply failure

In case of a power supply failure, the pump restarts automatically when power returns and runs for at least 10 s.

4. Starting up the product

WARNING

Flammable material

Death or serious personal injury



- Do not use the pump for flammable liquids, such as diesel oil, petrol or similar liquids.

DANGER

Electric shock


Death or serious personal injury



- Do not use the pump in swimming pools, garden ponds or similar places if there are people in the water.

1. Open a tap in the system.
2. Switch on the power supply.
3. Check that the pump is running and water is coming out of the tap.
4. Check that the pump is running and pressure is being built up in the system.
5. Close the tap.
6. Check that pressure has been built up in the system.
7. Check that the pump stops after 10 seconds.

Water is accumulated between the motor housing and cover during submersion. When the pump is stopped and lifted from a submerged position, so the drain holes are above water level, the water is drained from the drain holes located under the red ring.

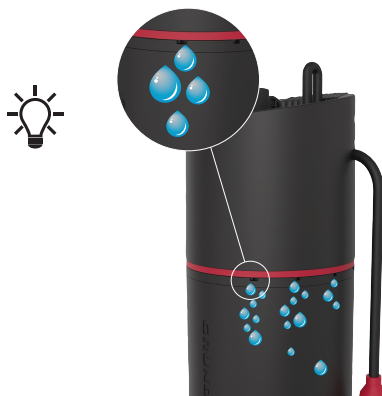

TM083090



Connect SB pumps to an external controller.

Related information

[8.5 Leaking water from the drain holes](#)

4.1 SBA starting and stopping conditions

When water is consumed in the water supply system, the pump starts when the starting conditions are fulfilled. This happens for example when a tap is opened which makes the pressure in the system drop. The control unit stops the pump again when consumption stops, that is when the tap is closed.

Starting conditions

The pump starts when one of the following conditions is fulfilled:

- The flow rate is higher than the minimum flow rate.
- The pressure is lower than the start pressure.

Stopping conditions

The pump stops with a time delay of 10 s when the flow rate is lower than the minimum flow rate.

The start pressure and minimum flow rate values are shown in sections Pressure and Flow rate.

Automatic restart of SBA pumps

SBA pump models with a float switch automatically restart when water is added. Models without a float switch will attempt to restart every 24 hours.

Related information

[9.1.1 Flow rate](#)

[9.1.4 Pressure](#)

5. Handling and storing the product

5.1 Handling the product



Do not lift the product by the power cable.
Lift the product by means of a rope.
Do not drop or shake the product.

5.2 Storing the product

Store the product indoors in a dry and dust-free environment. Protect the product from vibrations.
Storage temperature: -10 to +40 °C.

5.3 Frost protection

If the pump is not used during periods of frost, drain the pump and the pipe system before you take the pump out of operation.

6. Product introduction

6.1 Product description

The pumps are submersible booster pumps available in two main versions:

- pump with integrated inlet strainer with 1 mm mesh
- pump with side inlet, which includes a flexible inlet hose with floating inlet strainer with 1.8 mm mesh.

Both versions are available with or without float switch. The float switch can be used for automatic operation or dry-running protection of the pump.

6.2 SB pumps

The SB submersible booster pump is available with integrated inlet strainer or floating inlet strainer. The SB pump must be connected to an external controller, see section Connecting to external controller.

Related information

[3.6.2 Connecting to external controller](#)

6.3 SBA pumps

The SBA pump is a complete submersible booster pump available with integrated inlet strainer or floating inlet strainer.

SBA has a built-in control unit, eliminating the need for a controller.

The pump has built-in protection against overheating.

Related information

[3.6.2 Connecting to external controller](#)

6.4 SBA dry-running protection

The built-in control unit incorporates dry-running protection that automatically stops the pump in case of dry running.

The dry-running protection functions differently during priming and operation.

6.4.1 Dry running during priming

If the control unit does not detect any pressure and flow within 5 min after it has been connected to a power supply and the pump has started, the dry-running function is activated and the pump stops.

6.4.2 Dry running during operation

If the control unit does not detect any pressure and flow within 40 s during normal operation, the dry-running function is activated and the pump stops.

6.4.3 Resetting of dry-running alarm

If a dry-running alarm has been activated, you can restart the pump manually by switching off the power supply, wait for 2 min and reconnect power. If the control unit does not detect any pressure and flow within 40 s after restarting, the dry-running alarm is reactivated.

6.5 Intended use

Grundfos SB and SBA pumps are designed for pumping clean water. The pumps are especially suitable for rainwater applications and small private wells.

Typical applications:

- traditional wells
- shallow wells
- rainwater collection in tanks
- boosting of public water
- emptying of garden ponds
- irrigation.

6.6 Pumped liquids

The pumps are designed for fresh water with a maximum chloride content of 300 ppm and a free chlorine content below 1 ppm.


The product is suitable for pumping clean, thin, non-aggressive and non-explosive liquids without solid particles or fibres.

The pumps are not suitable for these liquids:

- liquids containing long fibres
- inflammable liquids (oil, petrol, etc.)
- aggressive liquids.

6.7 Identification

6.7.1 Nameplate

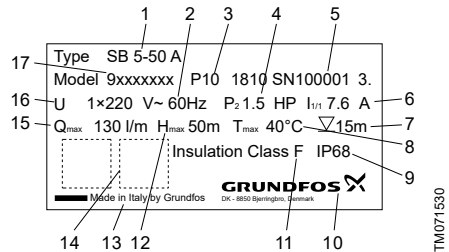

Example of nameplate

Pos.	Description
1	Product type
2	Frequency [Hz]
3	Production code (year and week)
4	50 Hz, P1: Power input [W] 60 Hz, P2: Motor output [HP]
5	Serial number
6	Full-load current [A]
7	Max. installation depth [m]
8	Max. liquid temperature [°C]
9	Enclosure class
10	Manufacturer
11	Motor insulation class
12	Max. head [m]
13	Country of origin
14	Approval marks
15	Max. flow rate [l/min]
16	Supply voltage [V]
17	Product number

7. Maintaining the product

DANGER

Electric shock

Death or serious personal injury



- If the power supply cable is damaged, it must be replaced by the manufacturer, his service agent or similarly qualified persons in order to avoid hazard.

Clean the strainer every fall with a brush and a water jet when needed. In normal operation, the pump does not require any specific maintenance.

8. Fault finding the product

See also the quick guide.

DANGER

Electric shock

Death or serious personal injury



- Switch off the power supply before you start any work on the product. Make sure that the power supply cannot be accidentally switched on.

8.1 The pump does not run.

Cause	Remedy
The fuses in the electrical installation are blown.	Replace the fuses. If the new fuses blow too, check the electrical installation and the power cable.
The residual-current circuit breaker, RCCB, has tripped.	Cut in the circuit breaker.
No power supply.	Contact the power supply company.
The motor protection has cut off the power supply due to overload.	<p>Check if the pump is blocked.</p> <ol style="list-style-type: none"> 1. Switch off the power supply to the pump. 2. Remove the rubber plug. 3. Try to turn the pump shaft with a screwdriver. 4. If the pump shaft is stuck, follow the instructions below in The pump is blocked. <p>Note: Remember to refit the rubber plug.</p>
The pump or the power cable is defective.	Repair or replace the pump or cable.
The float switch is in dry-running position.	<p>Check the water level and the float switch for free movability.</p> <p>Note: If the tank is empty, and the float switch is often in this position, install a larger tank.</p>
SBA: The dry-running protection of the pump has stopped the pump.	<p>Check the water level.</p> <p>Switch off the power supply and wait 2 min before switching it back on.</p>
The pump is blocked.	<p>Check and clean the pump.</p> <ol style="list-style-type: none"> 1. Switch off the power supply to the pump. 2. Remove the screws at the bottom of the pump with a cross-head screwdriver. 3. Remove the pump base. 4. Clean the inlet strainer and hydraulic parts with a brush and a water jet. 5. Reassemble the pump.

8.2 The pump runs but gives no water.

Cause	Remedy
The outlet valve is closed.	Open the valve.
No water or too low water level in the tank.	Increase the installation depth of the pump. Reduce the pump performance, or replace the pump by a pump with a lower performance.
The non-return valve is stuck in its closed position.	Pull out the pump, and clean or replace the valve.
The inlet strainer is clogged.	Pull out the pump, and clean the inlet strainer with a brush and a water jet.
The pump is defective.	Repair or replace the pump.

8.3 The pump runs at reduced performance.

Cause	Remedy
The valves in the outlet pipe are partly closed or blocked.	Check and clean or replace the valves.
The outlet pipe is partly blocked by impurities.	Clean or replace the pipe.
The non-return valve in the outlet pipe is partly blocked.	Clean or replace the valve.
The pump and outlet pipe are partly blocked by impurities.	Pull out the pump. Check and clean or replace the pump. Clean the pipes.
The inlet strainer is clogged.	Clean the inlet strainer.
The pump is defective.	Repair or replace the pump.
Leakage in the pipes.	Check and repair the pipes.
The outlet pipe is defective.	Replace the outlet pipe.
Undervoltage has occurred.	Check the power supply.

8.4 Frequent starts and stops.

Cause	Remedy
The float switch has not been adjusted correctly.	Adjust the float switch to ensure suitable time between the cutting-in and cutting-out of the pump.
The non-return valve is leaking or stuck half-open.	Clean or replace the non-return valve.
The supply voltage is unstable.	Check the power supply.
The motor temperature is too high.	Check the water temperature.
The pump is blocked.	Check and clean the pump. <ol style="list-style-type: none"> 1. Switch off the power supply to the pump. 2. Remove the screws at the bottom of the pump with a cross-head screwdriver. 3. Remove the pump base. 4. Clean the inlet strainer and hydraulic parts with a brush and a water jet. 5. Reassemble the pump.
Leakage in the pipes.	Check and repair the pipes.

Related information

[3.1.2 Highest tapping point for SBA pumps](#)

8.5 Leaking water from the drain holes

Cause	Remedy
The water is drained from the drain holes located under the red ring when the pump is stopped and the drain holes are above water level.	<ul style="list-style-type: none"> • This is normal behaviour.

Related information

[4. Starting up the product](#)

9. Technical data

9.1 Operating conditions

9.1.1 Flow rate

Max. flow rate	[m ³ /h]
SB	3
SBA	3

Min. flow rate	[l/min]
SBA 3-35	1.0
SBA 3-45	1.0

Related information

[4.1 SBA starting and stopping conditions](#)

9.1.2 Max. head

	[m]
SB 3-35	35
SB 3-45	45
SBA 3-35	35
SBA 3-45	45

9.1.3 Temperature

Liquid temperature	[°C]
SB	0 to 40
SBA	0 to 40

Storage temperature	[°C]
SB	-10 to +40
SBA	-10 to +40

9.1.4 Pressure

Start pressure	[bar]	[MPa]
SBA 3-35	1.5	0.15
SBA 3-45	2.4	0.22

Related information

[4.1 SBA starting and stopping conditions](#)

9.1.5 Frequency of starts and stops

Maximum starts per hour	
SB	20
SBA	20

9.2 Mechanical data

Cable length	[m]
SB	15
SBA	15

Maximum installation depth	[m]
SB	10
SBA	10

Protection class	
Enclosure class	IP68
Insulation class	F

9.3 Electrical data

SB	Voltage [V]	Frequency [Hz]	P1	P2	I _{1/1}
			[kW]	[kW]	[A]
3-35	1 × 230	50	0.70	0.47	3.35
3-45			0.80	0.55	3.60
3-35	1 × 115	60	0.66	0.45	6.30
3-45			0.85	0.62	7.70
3-35	1 × 230		0.70	0.48	2.70
3-45			0.76	0.57	3.40

SBA	Voltage [V]	Frequency [Hz]	P1	P2	I _{1/1}
			[kW]	[kW]	[A]
3-35	1 × 230	50	0.72	0.47	3.3
3-45			0.78	0.55	3.6
3-35	1 × 115	60	0.66	0.45	6.4
3-45			0.84	0.62	7.8
3-35	1 × 230		0.70	0.47	3.3
3-45			0.76	0.57	3.4

9.3.1 Speed

Speed	50 Hz	60 Hz
	[min ⁻¹]	[min ⁻¹]
SB	2800	3400
SBA	2800	3400

10. Further product information

For further product documentation, see product-selection.grundfos.com.

11. Disposing of the product

This product or parts of it must be disposed of in an environmentally sound way.

1. Use the public or private waste collection service.
2. If this is not possible, contact the nearest Grundfos company or service workshop.



The crossed-out wheeled bin symbol on a product means that it must be disposed of separately from household waste. When a product marked with this symbol reaches its end of life, take it to a collection point designated by the local waste disposal authorities. The separate collection and recycling of such products will help protect the environment and human health.

See also end-of-life information at www.grundfos.com/product-recycling.

Argentina

Bombas GRUNDFOS de Argentina S.A.
Ruta Panamericana km. 37.500 Industrias
1619 - Garin Pcia. de B.A.
Tel.: +54-3327 414 444
Fax: +54-3327 45 3190

Australia

GRUNDFOS Pumps Pty. Ltd.
P.O. Box 2040
Regency Park
South Australia 5942
Tel.: +61-8-8461-4611
Fax: +61-8-8340-0155

Austria

GRUNDFOS Pumpen Vertrieb
Ges.m.b.H.
Grundfosstraße 2
A-5082 Grödig/Salzburg
Tel.: +43-6246-883-0
Fax: +43-6246-883-30

Belgium

N.V. GRUNDFOS Bellux S.A.
Boommsesteenweg 81-83
B-2630 Aartselaar
Tel.: +32-3-870 7300
Fax: +32-3-870 7301

Belarus

Представительство ГРУНДФОС в
Минске
220125, Минск
ул. Шафарнянская, 11, оф. 56, БЦ
«Порт»
Тел.: +375 17 397 397 3
+375 17 397 397 4
Факс: +375 17 397 397 1
E-mail: minsk@grundfos.com

Bosnia and Herzegovina

GRUNDFOS Sarajevo
Zmaja od Bosne 7-7A
BiH-71000 Sarajevo
Tel.: +387 33 592 480
Fax: +387 33 590 465
www.ba.grundfos.com
E-mail: grundfos@bih.net.ba

Brazil

BOMBAS GRUNDFOS DO BRASIL
Av. Humberto de Alencar Castelo
Branco, 630
CEP 09850 - 300
São Bernardo do Campo - SP
Tel.: +55-11 4393 5533
Fax: +55-11 4343 5015

Bulgaria

Grundfos Bulgaria EOOD
Slatina District
Iztocna Tangenta street no. 100
BG - 1592 Sofia
Tel.: +359 2 49 22 200
Fax: +359 2 49 22 201
E-mail: bulgaria@grundfos.bg

Canada

GRUNDFOS Canada inc.
2941 Brighton Road
Oakville, Ontario
L6H 6C9
Tel.: +1-905 829 9533
Fax: +1-905 829 9512

China

GRUNDFOS Pumps (Shanghai) Co. Ltd.
10F The Hub, No. 33 Suhong Road
Minhang District
Shanghai 201106 PRC
Tel.: +86 21 612 252 22
Fax: +86 21 612 253 33

Columbia

GRUNDFOS Colombia S.A.S.
Km 1.5 via Siberia-Cota Conj. Potrero
Chico,
Parque Empresarial Arcos de Cota Bod.
1A.
Cota, Cundinamarca
Tel.: +57(1)-2913444
Fax: +57(1)-8764586

Croatia

GRUNDFOS CROATIA d.o.o.
Buzinski prilaz 38, Buzin
HR-10010 Zagreb
Tel.: +385 1 6595 400
Fax: +385 1 6595 499
www.hr.grundfos.com

Czech Republic

GRUNDFOS Sales Czechia and Slovakia
s.r.o.
Čajkovského 21
779 00 Olomouc
Tel.: +420-585-716 111

Denmark

GRUNDFOS DK A/S
Martin Bachs Vej 3
DK-8850 Bjerringbro
Tel.: +45-87 50 50 50
Fax: +45-87 50 51 51
E-mail: info_GDK@grundfos.com
www.grundfos.com/DK

Estonia

GRUNDFOS Pumps Eesti OÜ
Peterburi tee 92G
11415 Tallinn
Tel.: + 372 606 1690
Fax: + 372 606 1691

Finland

OY GRUNDFOS Pumpat AB
Trukkikuja 1
FI-01360 Vantaa
Tel.: +358-(0) 207 889 500

France

Pompes GRUNDFOS Distribution S.A.
Parc d'Activités de Chesnes
57, rue de Malacombe
F-38290 St. Quentin Fallavier (Lyon)
Tel.: +33-4 74 82 15 15
Fax: +33-4 74 94 10 51

Germany

GRUNDFOS GMBH
Schlüterstr. 33
40699 Erkrath
Tel.: +49-(0) 211 929 69-0
Fax: +49-(0) 211 929 69-3799
E-mail: infoservice@grundfos.de
Service in Deutschland:
kundendienst@grundfos.de

Greece

GRUNDFOS Hellas A.E.B.E.
20th km. Athinon-Markopoulou Av.
P.O. Box 71
GR-19002 Peania
Tel.: +0030-210-66 83 400
Fax: +0030-210-66 46 273

Hong Kong

GRUNDFOS Pumps (Hong Kong) Ltd.
Unit 1, Ground floor, Siu Wai industrial
Centre
29-33 Wing Hong Street & 68 King Lam
Street, Cheung Sha Wan
Kowloon
Tel.: +852-27861706 / 27861741
Fax: +852-27858664

Hungary

GRUNDFOS Hungária Kft.
Tópark u. 8
H-2045 Törökbálint
Tel.: +36-23 511 110
Fax: +36-23 511 111

India

GRUNDFOS Pumps india Private Limited
118 Old Mahabalipuram Road
Thoraiakkam
Chennai 600 097
Tel.: +91-44 2496 6800

Indonesia

PT GRUNDFOS Pompa
Graha intirub Lt. 2 & 3
Jln. Cililitan Besar No.454. Makasar,
Jakarta Timur
ID-Jakarta 13650
Tel.: +62 21-469-51900
Fax: +62 21-460 6910 / 460 6901

Ireland

GRUNDFOS (Ireland) Ltd.
Unit A, Merrywell Business Park
Ballymount Road Lower
Dublin 12
Tel.: +353-1-4089 800
Fax: +353-1-4089 830

Italy

GRUNDFOS Pompe Italia S.r.l.
Via Gran Sasso 4
I-20060 Truccazzano (Milano)
Tel.: +39-02-95838112
Fax: +39-02-95309290 / 95838461

Japan

GRUNDFOS Pumps K.K.
1-2-3, Shin-Miyakoda, Kita-ku
Hamamatsu
431-2103 Japan
Tel.: +81 53 428 4760
Fax: +81 53 428 5005

Korea

GRUNDFOS Pumps Korea Ltd.
6th Floor, Aju Building 679-5
Yeoksam-dong, Kangnam-ku, 135-916
Seoul, Korea
Tel.: +82-2-5317 600
Fax: +82-2-5633 725

Latvia

SIA GRUNDFOS Pumps Latvia
 Deglava biznesa centrs
 Augusta Deglava ielā 60
 LV-1035, Rīga,
 Tel.: + 371 714 9640, 7 149 641
 Fax: + 371 914 9646

Lithuania

GRUNDFOS Pumps UAB
 Smolensko g. 6
 LT-03201 Vilnius
 Tel.: + 370 52 395 430
 Fax: + 370 52 395 431

Malaysia

GRUNDFOS Pumps Sdn. Bhd.
 7 Jalan Peguam U1/25
 Glenmarie Industrial Park
 40150 Shah Alam, Selangor
 Tel.: +60-3-5569 2922
 Fax: +60-3-5569 2866

Mexico

Bombas GRUNDFOS de México
 S.A. de C.V.
 Boulevard TLC No. 15
 Parque industrial Stiva Aeropuerto
 Apodaca, N.L. 66600
 Tel.: +52-81-8144 4000
 Fax: +52-81-8144 4010

Netherlands

GRUNDFOS Netherlands
 Veluwezoom 35
 1326 AE Almere
 Postbus 22015
 1302 CA ALMERE
 Tel.: +31-88-478 6336
 Fax: +31-88-478 6332
 E-mail: info_gnl@grundfos.com

New Zealand

GRUNDFOS Pumps NZ Ltd.
 17 Beatrice Tinsley Crescent
 North Harbour Industrial Estate
 Albany, Auckland
 Tel.: +64-9-415 3240
 Fax: +64-9-415 3250

Norway

GRUNDFOS Pumper A/S
 Strømsveien 344
 Postboks 235, Leirdal
 N-1011 Oslo
 Tel.: +47-22 90 47 00
 Fax: +47-22 32 21 50

Poland

GRUNDFOS Pompy Sp. z o.o.
 ul. Klonowa 23
 Baranowo k. Poznań
 PL-62-081 Przeźmierowo
 Tel.: (+48-61) 650 13 00
 Fax: (+48-61) 650 13 50

Portugal

Bombas GRUNDFOS Portugal, S.A.
 Rua Calvet de Magalhães, 241
 Apartado 1079
 P-2770-153 Paço de Arcos
 Tel.: +351-21-440 76 00
 Fax: +351-21-440 76 90

Romania

GRUNDFOS Pompe România SRL
 S-PARK BUSINESS CENTER, Clădirea
 A2, etaj 2
 Str. Tipografilor, Nr. 11-15, Sector 1, Cod
 013714
 Bucuresti, Romania
 Tel.: 004 021 2004 100
 E-mail: romania@grundfos.ro

Russia

ООО Грундфос Россия
 ул. Школьная, 39-41
 Москва, RU-109544, Russia
 Тел. (+7) 495 564-88-00 (495) 737-30-00
 Факс (+7) 495 564 8811
 E-mail grundfos.moscow@grundfos.com

Serbia

Grundfos Srbija d.o.o.
 Omladinskih brigada 90b
 11070 Novi Beograd
 Tel.: +381 11 2258 740
 Fax: +381 11 2281 769
 www.rs.grundfos.com

Singapore

GRUNDFOS (Singapore) Pte. Ltd.
 25 Jalan Tukang
 Singapore 619264
 Tel.: +65-6681 9688
 Fax: +65-6681 9689

Slovakia

GRUNDFOS s.r.o.
 Prievozská 4D 821 09 BRATISLAVA
 Tel.: +421 2 5020 1426
 sk.grundfos.com

Slovenia

GRUNDFOS LJUBLJANA, d.o.o.
 Leskoškova 9e, 1122 Ljubljana
 Tel.: +386 (0) 1 568 06 10
 Fax: +386 (0) 1 568 06 19
 E-mail: tehnika-si@grundfos.com

South Africa

GRUNDFOS (PTY) LTD
 16 Lascelles Drive, Meadowbrook Estate
 1609 Germiston, Johannesburg
 Tel.: (+27) 10 248 6000
 Fax: (+27) 10 248 6002
 E-mail: lgradidge@grundfos.com

Spain

Bombas GRUNDFOS España S.A.
 Camino de la Fuentequilla, s/n
 E-28110 Algete (Madrid)
 Tel.: +34-91-848 8800
 Fax: +34-91-628 0465

Sweden

GRUNDFOS AB
 Box 333 (Lunnagårdsgatan 6)
 431 24 Mölndal
 Tel.: +46 31 332 23 000
 Fax: +46 31 331 94 60

Switzerland

GRUNDFOS Pumpen AG
 Bruggacherstrasse 10
 CH-8117 Fällanden/ZH
 Tel.: +41-44-806 8111
 Fax: +41-44-806 8115

Taiwan

GRUNDFOS Pumps (Taiwan) Ltd.
 7 Floor, 219 Min-Chuan Road
 Taichung, Taiwan, R.O.C.
 Tel.: +886-4-2305 0868
 Fax: +886-4-2305 0878

Thailand

GRUNDFOS (Thailand) Ltd.
 92 Chaloeam Phrakiat Rama 9 Road
 Dokmai, Pravej, Bangkok 10250
 Tel.: +66-2-725 8999
 Fax: +66-2-725 8998

Turkey

GRUNDFOS POMPA San. ve Tic. Ltd.
 Sti.
 Gebze Organize Sanayi Bölgesi
 Ihsan dede Caddesi
 2. yol 200. Sokak No. 204
 41490 Gebze/ Kocaeli
 Tel.: +90 - 262-679 7979
 Fax: +90 - 262-679 7905
 E-mail: satis@grundfos.com

Ukraine

ТОВ "ГРУНДФОС УКРАЇНА"
 Бізнес Центр Європа
 Столичне шосе, 103
 м. Київ, 01311, Україна
 Tel.: (+38 044) 237 04 00
 Fax: (+38 044) 237 04 01
 E-mail: ukraine@grundfos.com

United Arab Emirates

GRUNDFOS Gulf Distribution
 P.O. Box 16768
 Jebel Ali Free Zone, Dubai
 Tel.: +971 4 8815 166
 Fax: +971 4 8815 136

United Kingdom

GRUNDFOS Pumps Ltd.
 Grovebury Road
 Leighton Buzzard/Beds. LU7 4TL
 Tel.: +44-1525-850000
 Fax: +44-1525-850011

U.S.A.

Global Headquarters for WU
 856 Koomey Road
 Brookshire, Texas 77423 USA
 Phone: +1-630-236-5500

Uzbekistan

Grundfos Tashkent, Uzbekistan
 The Representative Office of Grundfos
 Kazakhstan in Uzbekistan
 38a, Oybek street, Tashkent
 Tel.: (+998) 71 150 3290 / 71 150 3291
 Fax: (+998) 71 150 3292

99057358 10.2022

ECM: 1349505

www.grundfos.com

GRUNDFOS 

© 2022 Grundfos Holding A/S, all rights reserved.

Trademarks displayed in this material, including but not limited to Grundfos and the Grundfos logo, are registered trademarks owned by The Grundfos Group.